


GALVANIZED BUCKET ELEVATOR

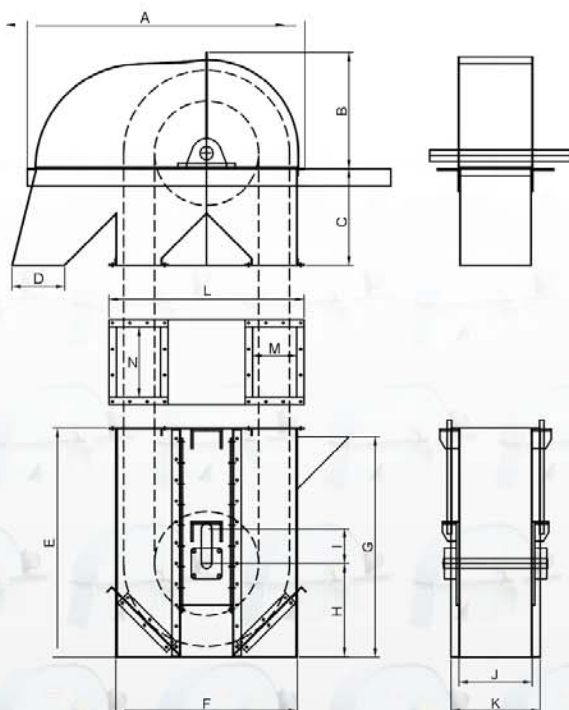

NOTE: The capacity is based on paddy rice in the following table.

- Convert to corn add about 20%
- Convert to milo add about 22%
- Convert to wheat add about 25%
- Convert to soya bean add about 25%

ENGINEERING SPECIFICATION

CAPACITY	PULLEY DIAMETER	TRUNKING	BELT SPEED	BELT WIDTH	BUCKET SIZE	BUCKET SPACE
40 T/Hr	600mm(24")	406mm x 254mm	2.2 m/sec	13" x 4P	12" x 6"	20cm
50 T/Hr	600mm(24")	406mm x 254mm	2.7 m/sec	13" x 4P	12" x 6"	20cm
80 T/Hr	762mm(30")	460mm x 340mm	3.0 m/sec	15" x 5P	14" x 8"	25cm
100 T/Hr	914mm(36")	490mm x 355mm	2.7 m/sec	17" x 5P	16" x 8"	25cm

STANDARD & METRIC DIMENSION (Unit : mm)

CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L	M	N
40 T/Hr	1684	668	566	305	1320	1046	1270	540	200	414	514	1124	254	406
50 T/Hr	1684	668	566	305	1320	1046	1270	540	200	414	514	1124	254	406
80 T/Hr	2038	815	690	305	1504	1340	1450	620	200	460	550	1420	340	460
100 T/Hr	2430	954	880	358	1764	1562	1700	780	200	492	592	1662	355	490

NO.21, HO-HOU VILLAGE, HSIN-FONG HSIANG, HSIN-CHU HSIEN 304, TAIWAN.

TEL : 886-3-5680587 FAX: 886-3-5689818 WEB : <http://www.alminco.com> E-mail: info@alminco.com